

Beyerle US L.L.C., ABP-Beyerle, it's subsidiaries and agents are not responsible or liable for damage or injury to any persons or property due to improper installation of it's products. All liabilities reside solely with the installer.



Be sure to tighten all screw

steel cleaners!

to use the sliding door fittings!

connections one week after starting

Neveruse scouring agents to clean

the sliding door fittings; rather use commercially available stainless-

Beyerle US L.L.C. 5126 South Royal Atlanta Drive, Tucker, GA 30084, USA Phone (770) 349 - 6324 , Fax (770) 934 - 3384 , mail: info@beyerle-us.com, www.beyerle-us.com

 $\bigcirc$ Screw on 6 Loosen/Tighten Install 90° At right angle Drill Dowels ╶╬╴ Adjust Set Level Perpendicular Measure Mark  $\odot$ Visual inspection 0 Special-tool **1** 2 people required 10 20 Measure ? **Clarify** questions See Instructions

\_\_\_\_ ₽**\_**©

Secure


A

 $\odot$ 

Attention

Screw on

Installation instructions for wooden doors (max. 1 -3/4" inch) Α 5 1⁄8″ В В 1″ С C 

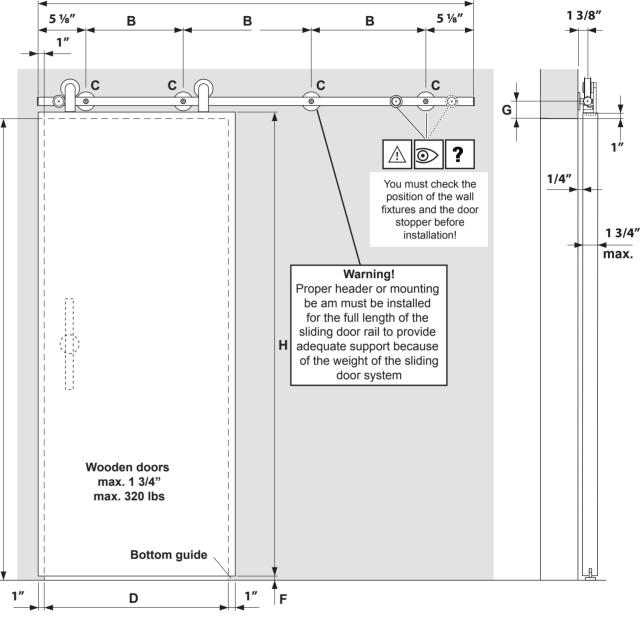

Complete-set's

Е


A Inch	B Inch	C Each	D Inch	E max. Inch	F Inch	G Inch	H max. Inch (H=E-F+1")
70 <sup>7</sup> /8″	20 ¼″	4	<b>29</b> ½″ - <b>35</b> ½″	<b>98</b> 7⁄16″	1/4″- 3/8″	<b>2</b> ¾″	<b>99</b> ½″
<b>82</b> <sup>1</sup> / <sub>16</sub> ″	<b>24</b> ½″	4	35 <sup>13</sup> ⁄16″ - 39 <sup>3</sup> ⁄8″	<b>98</b> 7⁄16″	1/4"- 3/8″	<b>2</b> ¾″	<b>99</b> ½″
<b>90</b> %16″	20 1⁄16″	5	<b>39</b> ¾″ - <b>44</b> ¼16″	<b>98</b> 7⁄16″	1/4"- 3/8″	<b>2</b> ¾″	<b>99</b> ½″
100″	22 7⁄16″	5	<b>44</b> ½″ - <b>49</b> ¾16″	98 7⁄16″	1/4"- 3/8″	<b>2</b> ¾″	<b>99</b> ½″

Right to make technical changes reserved - Dimensions in inch - Version 08.2018 © by ABP-Beyerle GmbH

wood US 55 30 00.0220\_Pandora\_

## Sliding door fittings **Pandora**

## ABP beverle

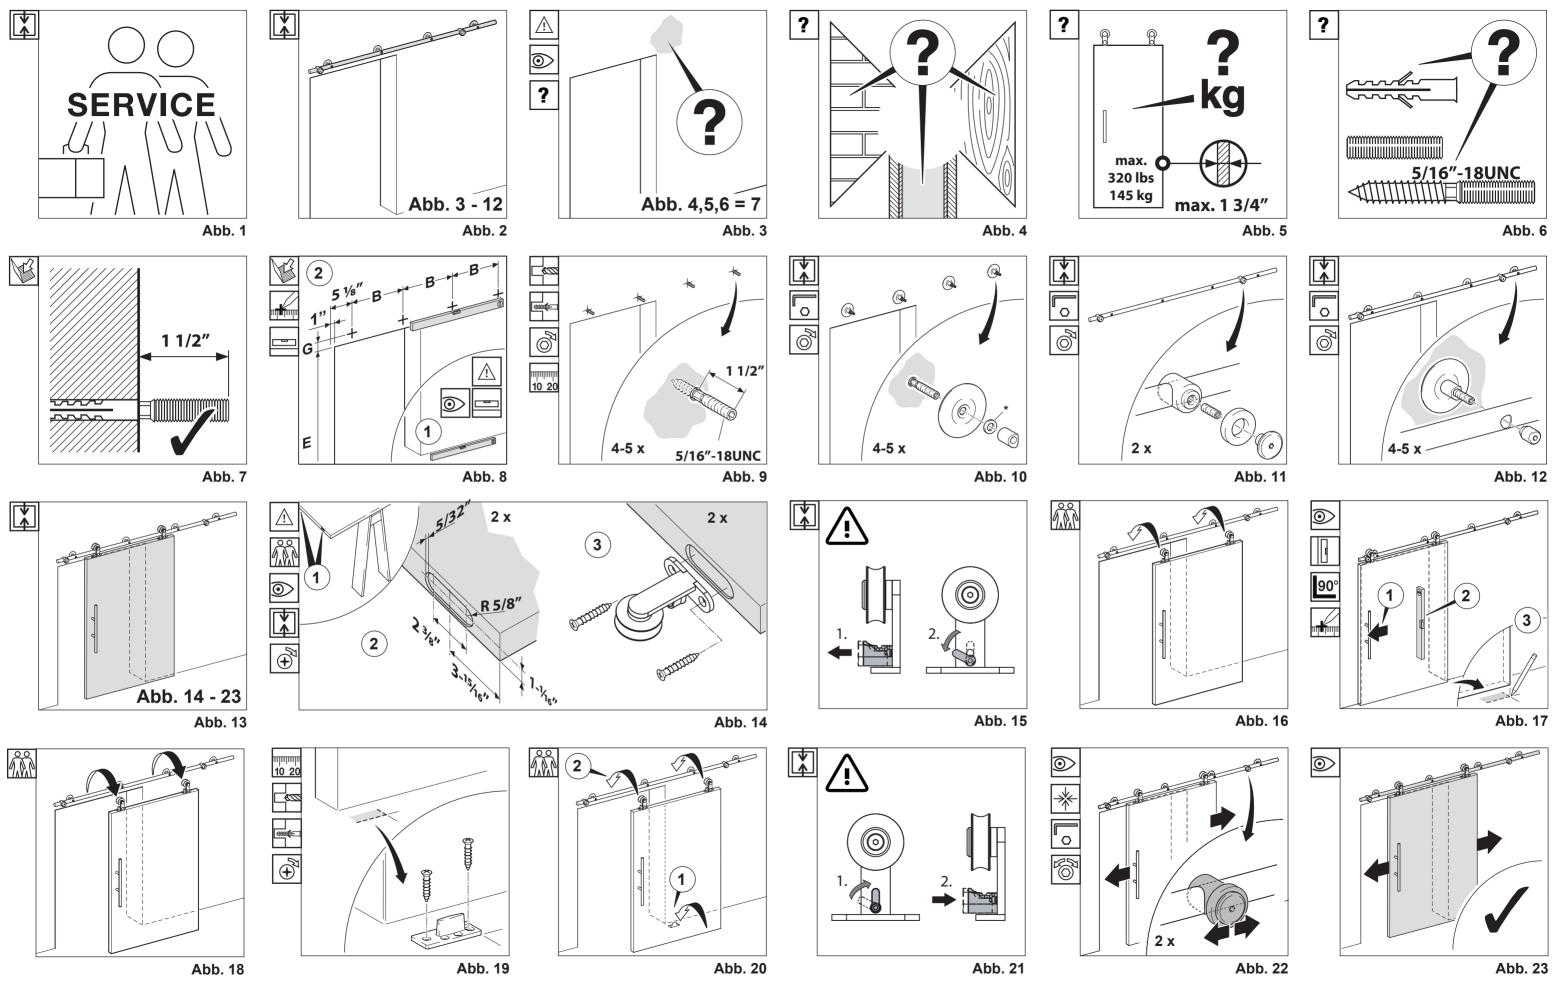

Right to make technical changes reserved - Dimensions in Inch - Version 08.2018 © by ABP-Beyerle GmbH

**ABP** beyerle

Installation instructions sliding door fittings Pandora for wooden doors