

Darby Wall Outlet 15-33

Installation Instructions





Tools You Will Need







Adjustable Pliers

Pencil

Screwdriver

Teflon Tape























For ease of installation you will need:

r ease of installation you will need:
To read the installation instructions completely before beginning. that may have occurred during transport.


To read all warnings, care, and maintenance information.

Note: Damage claims cannot be made during or


after installation.




Installation Instructions



Apply teflon tape to supply nipple. Thread on supply nipple to 1/2" NPT water supply. Apply teflon tape to supply nipple and thread on bushing with 12mm allen wrench.



screw. Slide on hand shower supply outlet trim assembly and secure with set




Applicable Standards/Codes


IAPMO certified to meet or exceed the following:
• ASME A112.18.1/CSA B125.1

- Uniform Plumbing Code
 National Plumbing Code of Canada



Installation **Dimensions**



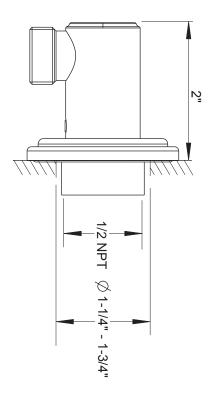

Cleaning Instructions

dry any overspray. This will maintain the finish and avoid water spotting. Rinse away any traces of soap and gently dry with a clean, soft cloth after each use. Rinse completely with water and

product. To remove mineral deposits, use a 50/50 solution of white vinegar and water. Do not allow the solution to soak on the

Follow instructions to ensure optimum results. Simichrome Polish® contains a protective film to enhance maintenance and is helpful in preventing water spot buildup

cleansers or disinfectants will alter the surface finish and void the warranty. Never use an abrasive material such as a brush or scouring pad to clean the surface. The use of abrasive cleaners,

and glass cleaners to remain on the surface. Prolonged contact will alter surface finishes and void the warranty. Do not allow certain materials such as toothpaste, cologne, shaving cream, nail polish remover, vinegar, wine, drain

We DO NOT recommend using any household cleaners as many can cause damage to the finish.

Please see the website for care instructions for specific finishes.

Warranty - This Crosswater London product is covered by a limited lifetime warranty. For full details, terms and conditions please visit our website Toll free number: 844-XWATER-1 (844-992-8371) For further information contact: Crosswater London, 393 Fortune Blvd., Milford, MA 01757 tel: 508-381-0433 fax: 508-381-6068 email: technical@crosswaterlondon.com www.crosswaterlondon.com