

Foster Induction hob


Milano Induction Bridge - **7390 945**

HIGHLIGHTS



Extended cooking area

Bridge function allow to associate two zones forming a single extended cooking area for pots of large size, or for more than one cooking simultaneously, with maximum flexibility in pot positioning.



Powerboost

Booster function [P], which provides increased power to the selected plate. In particular, when it is activated, the plate works for ten minutes at a very highpower that allows to heat quickly large quantities of water.





Slider control

The Slider control allows an extremely quick temperature setting: with a light touch of the finger you may select the desired power level on the TOUCH display.



T-chef

Allows to set particular temperatures (melt 70°C/158°F, simmer 94°C/201°F) and keep them constant during cooking. Elaborate preparations can be easily obtained, with chef-like results.



Bevelled edge

Special slanting edge that gives a clean and elegant finish with both the installation methods (flush-mount and overmount).

Recall


This feature allows you to call back the last settings selected in the previous cooking.

Pause

Allows you to distract your attention from cooking, interrupting and restoring the settings immediately.

Full Safety System

Centralised power-off function; Child-proof safety lock; Residual heat warning lights. Safety System that turn off the hob in the absence of the pot; Overflow detector that automatically turns off the plate in case of liquid overflow; Automatic deactivation to prevent accidents caused by forgetfulness.

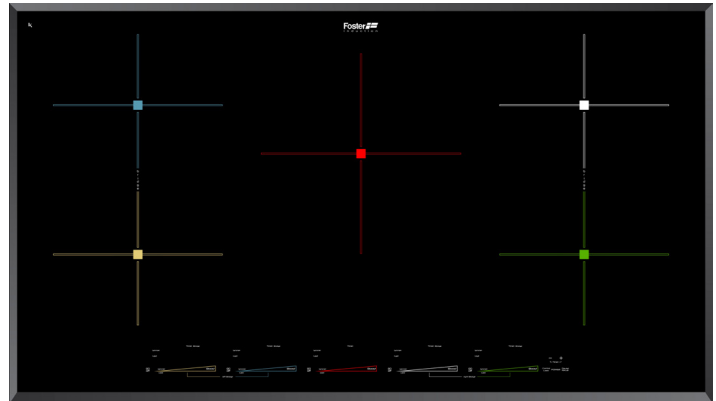


| Series | S4000 bridge Induction cooker hob |
|-------------------------------|-------------------------------------|
| Dimensions | 36" x 20 15/32" |
| Maintop | Black ceramic glass |
| Edge | bevelled edge |
| Installation | overmount |
| overmount cut-out | 33 55/64" x 19 19/64" |
| Power settings | 9 settings plus powerboost |
| Commands | 5 slider commands |
| Special functions | Bridge function |
| | T-chef function |
| | Pause and Recall |
| | independent timer |
| Security | security lock |
| | residual heat light |
| | overflow detection |
| Power | |
| 4 zones size 7x8" | 1.900-2.200 W (3.400-3.900 Booster) |
| 1 zone size 7x10" | 2.400-2.800 W (5.000-5.800 Booster) |
| Technical requirements | |
| Electrical supply | 208-240 V 50/60Hz |

Foster Induction hob

Milano Induction Bridge - **7390 945**

DIMENSIONS

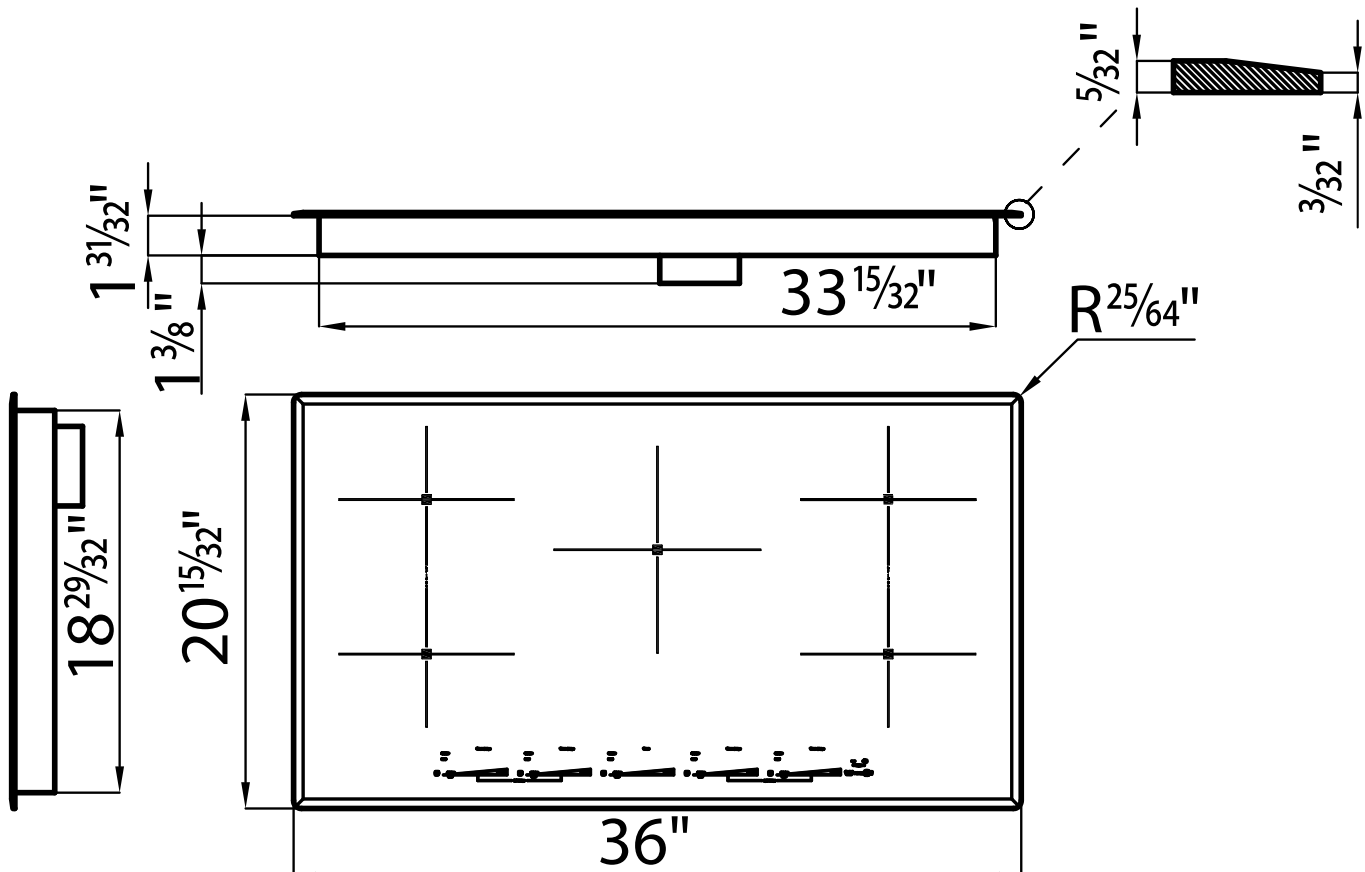

CUT OUT

33 55/64" X 19 19/64"