


### FEATURES

- Solid brass construction for durability and reliability
- Single lever handle allows for both ON/OFF activation and temperature setting
- Floor-mount installation
- 8-11/16" (221 mm) spout reach
- 10 gal/min (37.9 l/min) maximum flow rate at 45 psi (3.1 bar)
- Integral valve
- Includes hardware kit and escutcheon
- Complements the Per Se collection

### CODES/STANDARDS APPLICABLE

- Specified model meets or exceeds the following:
- ASME A112.18.1/CSA B125.1
  - ASSE 1014

# P24713

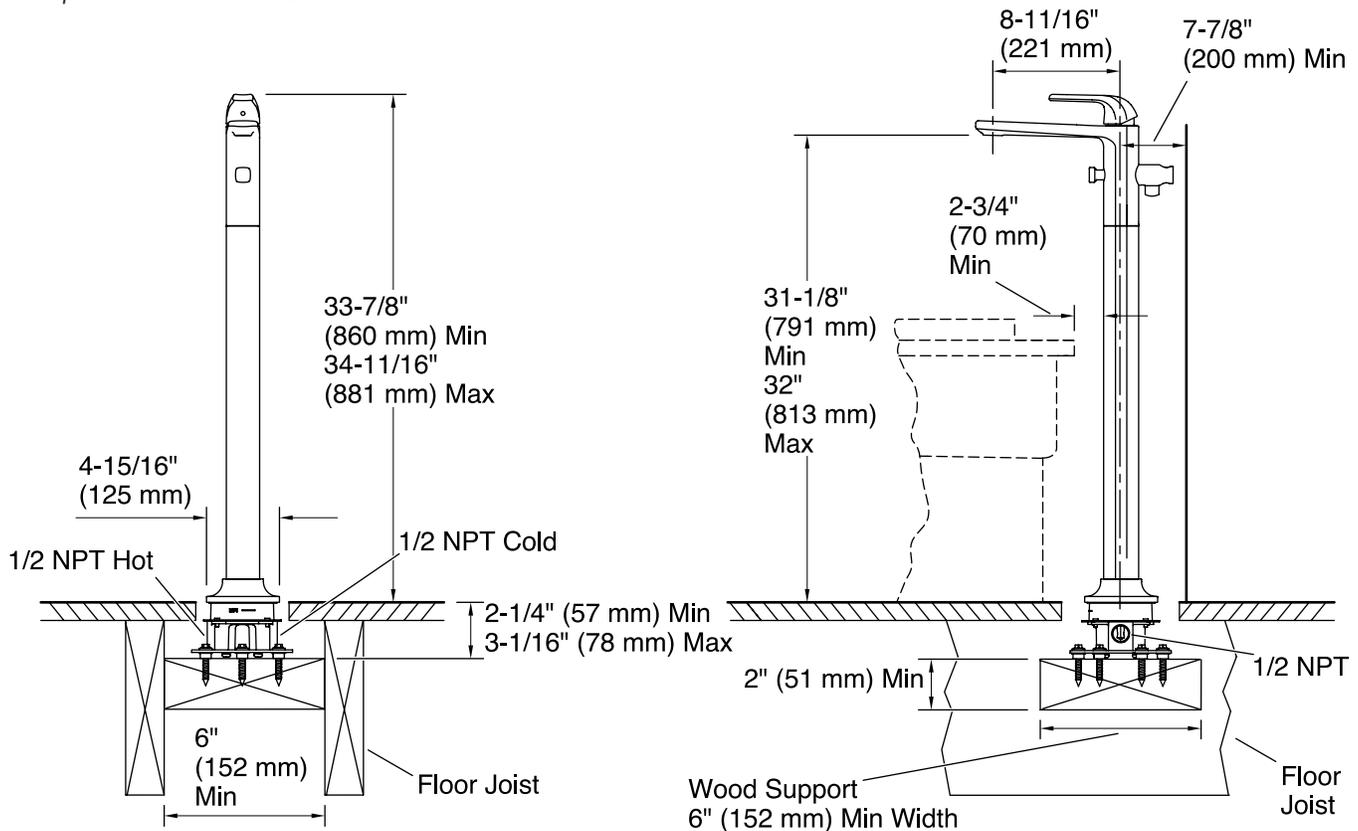

### SPECIFIED MODEL

Model	Description	Finishes		
P24713-00	Per Se Freestanding Bath Filler	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> SN Polished Nickel	<input type="checkbox"/> AF French Gold
Required Accessories				
P20511-00	Multi-Faucet Mounting Block	<input type="checkbox"/> NA		
P24761-00	Soft Modern Dual Function Handshower	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> SN Polished Nickel	<input type="checkbox"/> AF French Gold

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.