


### Specifications:


<b>Installation:</b>	built-in wall mount
<b>Exterior Dimensions:</b>	Ø 7 1/4"
<b>Material:</b>	solid brass construction with thermostatic cartridge and diverter ceramic cartridge with 2-way out
<b>Water use:</b>	6.1 GPM (43.5 PSI)
<b>Finishes:</b>	CR - polished chrome PN - polished nickel NI - brushed nickel BG - brushed gold 44 - matte black
<b>Fittings included:</b>	rough-in # VTH2 and trim # 15TH2.C.R-A

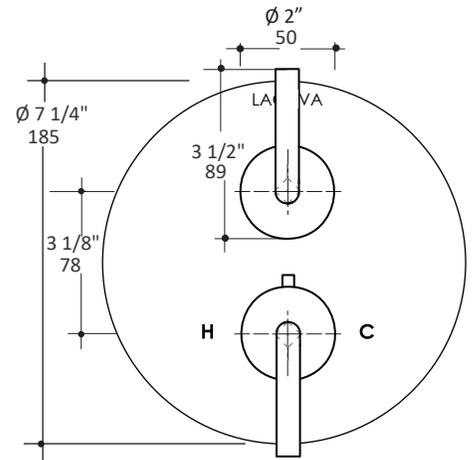

### Features:

- thermostatic valve with 2-way diverter and OFF function
- round backplate
- lever handles
- 3/4" NPT water IN and 1/2" NPT OUT connections
- anti-scald protection & temperature regulation
- water temperature set to 100°F
- screwdriver service stops
- finished wall must be flush with mudguard as marked
- 1 1/8" extension kit available

2 X F 1/2 NPT  
for 1/2 copper tubing

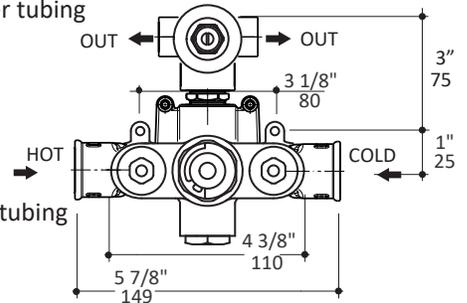


2 X F 3/4 NPT  
for 3/4 copper tubing

### Codes + Standards:

- Meets and exceeds applicable national codes and standards
- CAL-Green compliant

**ADA** compliant when installed to specific requirements of this regulation

**FINISHED WALL  
must be within  
the mudguard  
limits**

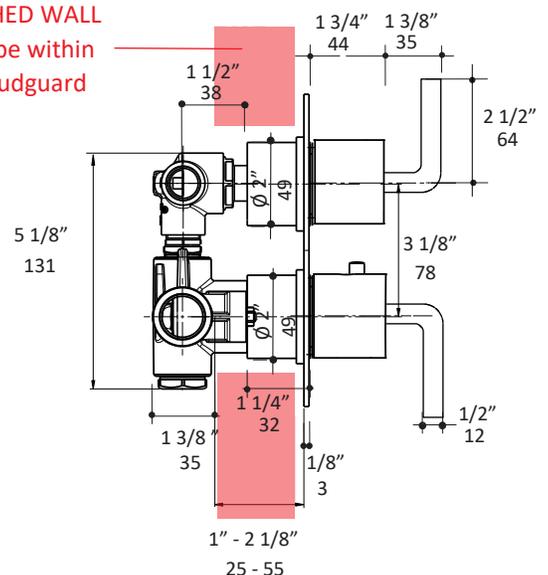

### Recommended Items:

- Replacement parts:
  - VTH2 rough-in with 2-way diverter
  - 15TH2.C.R-A trim
  - VTH0-CT thermostatic cartridge
  - VTH2-C diverter ceramic cartridge with 2-way out
  - VTH2-EX 1 1/8" extension kit

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary. Revised: 10/30/2020