


FEATURES

- ¼ turn washerless ceramic disc valve cartridges
- Flexible hose connection for 8" to 16" spread installations
- Flow rate 1.5 gpm (5.7 lpm) maximum flow rate
- Solid brass construction
- Listed by IAPMO, CSA, NSF, and other municipalities
- Warranty:
 - Limited lifetime warranty (residential use)
 - One year (commercial use)
- Shipping weight (lbs.) 10
- Shipping dimensions (in.): 29x12x4

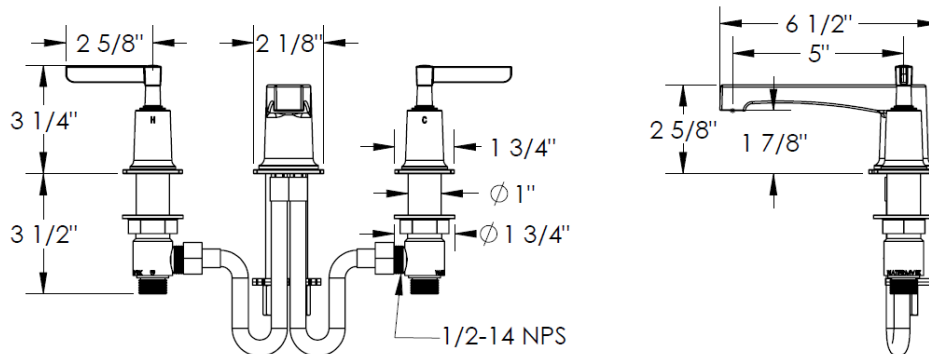


ITEM NO.	PART NUMBER	QTY.
1	115-2-SPT-BASE	1
2	115-2-SPT	1
3	PCA CACHE AERATOR	1
4	SPT-MNTNG-KIT-2-WSHR	1
5	SPT-MNTNG-KIT-2-RBBR-WSHR	1
6	SPT-MNTNG-KIT-1-SCRW	2
7	SPT-MNTNG-KIT-1-NUT	2
9	SPPLY-HOSE-0.5-14-NPS	2
10	AS568 - 029	1
11	142-LOCK-NUT	2
12H/12C	SS-502 VALVE BODY	2
13H/13C	SS-502-CARTRIDGE	2

IMPORTANT INSTALLATION INFORMATION


- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

HANDLE TRIMS


Code: MZ4

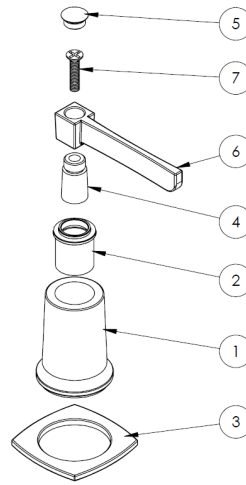


ITEM NO.	PART NUMBER	QTY.
1	MZ4-ESC	1
2	MZ4-ESC-NUT	1
3	MZ4-ESC-RING	1
4	MZ4-STEM	1
5	MZ4-POST-CAP	1
6	MZ4-POST	1
7	CR-FHMS 0.164-32x0.75x0.75-S	1

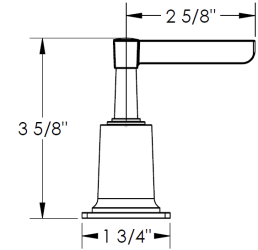

Code: MZ5

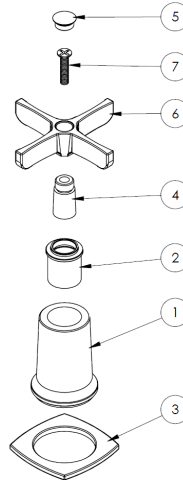

ITEM NO.	PART NUMBER	QTY.
1	MZ4-ESC	1
2	MZ4-ESC-NUT	1
3	MZ4-ESC-RING	1
4	MZ4-STEM	1
5	MZ4-POST-CAP	1
6	MZ5-CRSS-HNDL	1
7	CR-FHMS 0.164-32x0.75x0.75-S	1

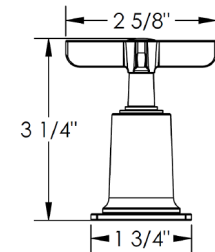

For technical support, please call 718-257-2800