

38-8.2- _EV4


Deck Mount Tub Filler with Hand Shower

Specify (K-N)

Hand Shower Flow Rate: 1.75 GPM

Note: Some building codes require remote pressure balance valves for anti-scald

K=5.5"
L=6.5"
M=7.5"
N=8.5"

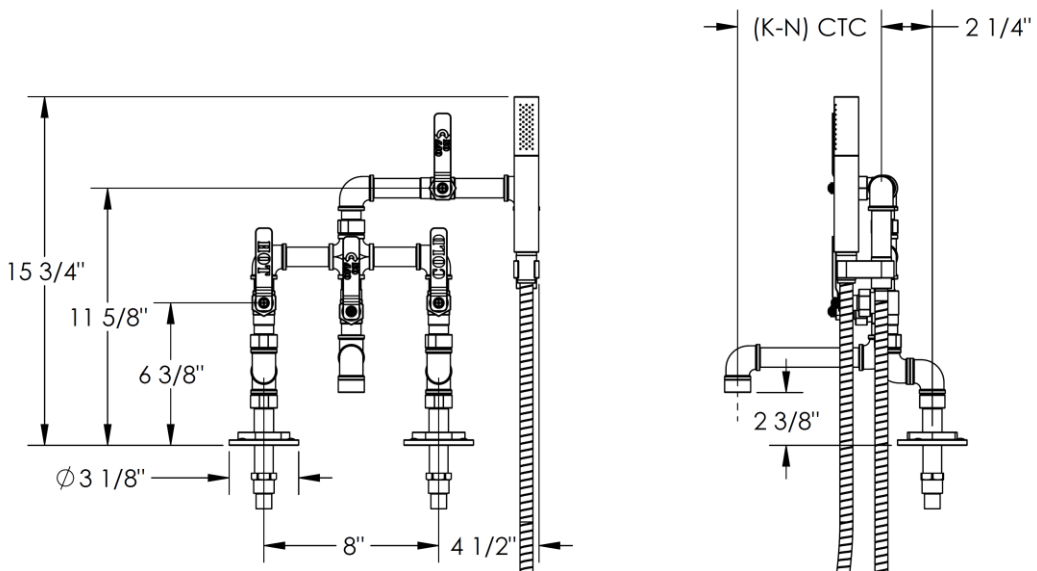

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings"

WATERMARK DESIGNS 5/27/2015