

Model **9121**

30" Solid Surface Basin



Model Shown: 9121 With Dyson Airblade™ Wash + Dry WD04 30" Wide Solid Surface Deck with Integrated Basin & Optional Trap Enclosure

- WALL MOUNTED 30" LENGTH SOLID SURFACE DECK WITH INTEGRATED BASIN
- INTENDED TO BE UTILIZED WITH DYSON AIRBLADE™ FAUCETS
- ACCOMMODATES HEAVY-DUTY COMMERCIAL FLOOR MOUNTED CARRIER
- ADA COMPLIANT (WHEN PROPERLY INSTALLED)




- OBC COMPLIANT (WHEN PROPERLY INSTALLED) (ONTARIO BUILDING CODE - CANADA)
- CSA COMPLIANT (CANADIAN STANDARDS ASSOCIATION)
- MATERIAL OF CONSTRUCTION IS FLAME SPREAD AND SMOKE DEVELOPED RATED "CLASS A" PER THE FOLLOWING STANDARDS:

ASTM E84-10 UL723 ANSI/NFPA No. 255 UBC No. 8-1

- MATERIAL ALSO COMPLIES WITH CANADIAN REQUIREMENTS CAN/ULC-S102 FOR FLAME SPREAD AND SMOKE DEVELOPED.
- MATERIAL OF CONSTRUCTIONS PHYSICAL PROPRIETIES IN COMPLIANCE WITH:

CSA B45.5/IAPMO Z124 ANSI/ICPA SS-1

 CORTERRA® SOLID SURFACE POLYMER FIXTURE COMPLIES WITH IAPMO IGC 156, CSA B45 SERIES, ASME A112.18.1/CSA B125.1V

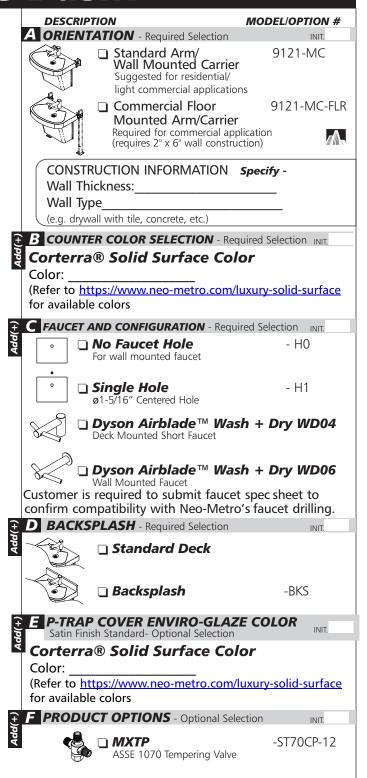





Latest product information **www.neo-metro.com**

Tech Sheet: **TS9121** Page **1/2** Last Revised: **10/01/19**

NEO-METRO



Model **9121**

30" Solid Surface Basin

Counter with Integral Basin is constructed of Corterra solid surface polymer resin. Fixture includes Grid Strainer and continuous Waste Piping with 1-1/2" P-Trap. **Note:** To Insure proper drainage use the supplied Grid Strainer. This product is not to be utilized with a "pop-up" type Drain Fitting.


The Deck is configured for Carrier mounting

A commercial floor mounted Arm/Carrier (-MC-FLR) is available optionally which requires a 2" x 6" wall construction. Carrier system is concealed in the wall therefore installation must be coordinated before wall is finished.


Optional P-Trap Enclosure conceals hot & cold Mixing Valve, Supply and Waste connections. Enclosure is fabricated of 18 gage, type 304 stainless steel with a satin finish engineered to provide a profile that complies with both ADA & OBC.

Basin is intended to be mounted to accommodate ADA. When mounted 34" at finished floor, fixture would comply with ANSI, UFAS and ADA requirements. Alternatively, when mounted 33" above finished floor, fixture would comply with OBC requirements. Compliance is subject to the interpretation and requirements of the local code authority

Dyson Airblade™ Wash + Dry Faucets are optionally available, in both deck and wall mounted versions. A 1-5/16" (33.3mm) hole can be drilled in a preconfigured single-hole (-H1) and a no hole option (-H0) for wall mounted faucets by others. Neo-Metro requires customers to submit specification sheet of Faucet to confirm compatibility. Custom Faucet configurations may be specified by submitting a completed and signed Faucet Drilling Worksheet. Neo-Metro stainless steel commercial faucets are available and sold separately.

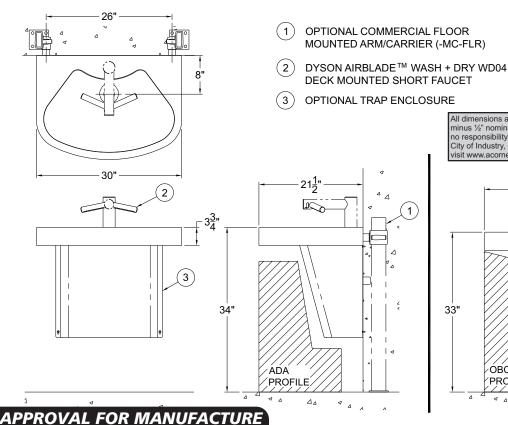

All dimensions are subject to manufacturer's tolerance of plus or minus ½" nominal and subject to change without notice. assumes no responsibility for use of void or superseded data. Neo-Metro, City of Industry, CA, Member of Morris Group International. Please visit www.acorneng.com for most current specifications.



COMPANY:	
PROJECT NAME:	
IGNEE'S NAME WRITTEN CLEARLY:	
DATE:	
-	

AUTHORIZED SIGNATURE: ___

NEO-METRO

Tech Sheet: **TS9121** Page **2/2** Last Revised: **10/01/19**